

C-FLEX

Compact and Flexible | Laser combiner



- Combines up to 4 or up to 6 wavelengths
- Compatible with 32 different wavelengths from 375 nm to 1064 nm
- Flexible and field upgradeable
- High speed modulation capabilities
- Fiber coupling with single or dual outputs
- Electromechanical shutter options
- Optional laser output power monitors


The highly-flexible, compact C-FLEX laser combiner allows you to combine up to 6 wavelengths of the 32 available wavelengths with modulation options for all wavelengths and configurations for single or dual outputs and optional fiber coupling.

The C-FLEX laser combiner harnesses the quality and reliability of the Cobolt high performance lasers. It is field upgradeable and ready to mount lasers from the Cobolt 06-01 Series, 08-01 Series, and 04-01 Series. The C-FLEX design allows for full flexibility in the choice of laser technology, ranging from plug and play diode lasers to high power, single frequency diode pumped lasers.

The robust design of the C-FLEX laser combiner provides excellent long-term stability in output power and beam overlap, as well as outstanding flexibility in terms of laser wavelength and type, which makes it ideally suited for use over a wide range of applications. C-FLEX can be fully customized, or is available as application-specific configurations which are tailored to deliver the optimum performance and features for applications in optogenetics, fluorescence microscopy, raman spectroscopy, or holography.

Applications

- Fluorescence Microscopy
- Raman Spectroscopy
- Holography
- Flow Cytometry
- Optogenetics
- Argon-Ion Replacement
- Multi-Disciplinary Applications
- Custom Solutions

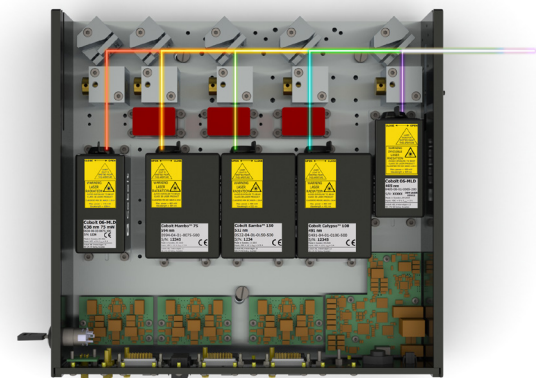

HÜBNER Photonics



C-FLEX

Available Wavelengths

375 nm	70 mW	●
395 nm	120 mW	●
405 nm	365 mW	●
415 nm	120 mW	●
425 nm	120 mW	●
445 nm	400 mW	●
457 nm	400 mW	●
473 nm	300 mW	●
488 nm	300 mW	●
491 nm	100 mW	●
505 nm	80 mW	●
515 nm	150 mW	●
520 nm	80 mW	●
532 nm	400 mW	●
553 nm	150 mW	●
561 nm	200 mW	●
594 nm	150 mW	●
633 nm	80 mW	●
638 nm	180 mW	●
647 nm	130 mW	●
660 nm	100 mW	●
685 nm	40 mW	●
705 nm	30 mW	●
730 nm	50 mW	●
760 nm	25 mW	●
785 nm	250 mW	●
808 nm	120 mW	●
830 nm	100 mW	●
915 nm	250 mW	●
940 nm	250 mW	●
975 nm	250 mW	●
1064 nm	400 mW	●

Combiner Optical Specifications

Output power losses per beam diverter	< 10 %
Fiber coupled power stability (8 hrs, ± 3 °C, SM/PM fiber)	± 2 %
Achievable fiber coupling efficiency (SM/PM fiber)	> 50 %
Temperature dependant pointing stability per laser (10-40 °C)	< 20 µrad / °C
Static beam pointing stability per laser (8 hrs, ± 3 °C)	< 50 µrad
Achievable beam position overlap at exit	< 50 µm
Achievable beam-to-beam angle deviation	< 150 µrad

Configuration


C-FLEX Model	C4	C6	C8
Article number	90417	90616	90626
Maximum number of Cobolt 06-01 or 08-01 lasers	4	6	8
Maximum number of Cobolt 04-01 lasers	2	3	3
Maximum number of AOMs	2	3	3
Minimum wavelength separation between laser lines	20 nm		
Standard wavelength ranges*	375 nm, 395 nm or 405 nm - 1064 nm		

*Custom solutions available

Operational Environment

Power supply requirement	15 V / 7 A
Communication protocol	USB
Maximum baseplate temperature	50 °C
Warm-up time to system thermal stability	< 15 min
Laser warm up time	< 3 min
Intended use environment	Laboratory
Storage temperature	10 - 40 °C
Humidity (non-condensing)	0-90% RH
Ambient air pressure	950-1050 mbar
Heat sink thermal impedance at 30 °C	< 0.2 K/W
Power consumption	< 100 W
System warranty period**	24 months

** 12 month limited warranty on combining optics for < 405 nm

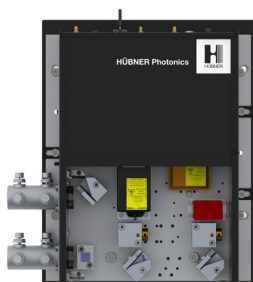

WARNING/DANGER VISIBLE AND INVISIBLE LASER RADIATION
Classified per IEC 60825-1:2014

Avoid eye or skin exposure to direct or scattered radiation.
Class 4 Laser Product



Avoid exposure to beam.
Class 3B Laser Product



This device contains components that may be sensitive to Electrostatic Discharge (ESD). ESD protection can be achieved with proper electrical grounding.



PRELIMINARY

Modulation Options

Emission control and power modulation options are available from 375 nm to 1064 nm. The Cobolt 06-01 Series lasers feature integrated modulation capabilities within the laser head. Acousto-optic modulators (AOM) are available for high speed modulation of Cobolt 04-01 and 08-01 Series lasers. Modulation controls are fully integrated into the C-FLEX.

Cobolt 06-01 Series modulation specifications

Product	o6-MLD	o6-DPL
Nominal Wavelength	375 - 520 nm, 633 - 1064 nm	532 - 594 nm
Digital power modulation		
Modulation frequency	DC - 10 MHz	DC - 1 kHz
Rise/fall time	< 2.5 ns	< 100 μs
Extinction ratio	> 10 000 000 : 1 (>70 dB)	
Input signal - Low	0 - 0.8 V	
Input signal - High	2 - 5 V	
Input signal - Impedance	2 kΩ	
Analog power modulation		
Modulation frequency	DC - 10 Hz	DC - 1 kHz
Rise/fall time	< 10 ms	< 100 μs
Extinction ratio	> 10 000 000 : 1 (>70 dB)	
Input signal	0 - 1 V -or- 0 - 5 V	
Threshold voltage	37 ± 5 mV (0 - 1 V) 68 ± 5 mV (0 - 5 V)	< 0.1 V (0 - 1 V) < 0.5 V (0 - 5 V)
Input signal - Impedance	2 kΩ -or- 50 Ω	
Digital current modulation		
Max. modulation frequency	> 100 MHz	> 10 kHz
Rise/fall time	< 2.5 ns	< 30 μs
Input signal - Low	0 - 0.8 V	
Input signal - High	2 - 5 V	
Input signal - Impedance	2 kΩ	
Analog current modulation		
Max. modulation frequency	> 300 kHz	> 10 kHz
Rise/fall time	< 2 μs	< 30 μs
Input signal	0 - 1 V -or- 0 - 5 V	
Threshold voltage	37 ± 5 mV (0 - 1 V) 68 ± 5 mV (0 - 5 V)	
Input signal - Impedance	2 kΩ -or- 50 Ω	

Acousto-optic modulation specifications

Cobolt Laser Product (compatibility)	Cobolt 04-01 Series and Cobolt 08-01 series
Nominal Wavelength	457 - 1064 nm
Expected AOM throughput	> 80 %
Output impedance – RF output connector	50 Ω (nom.)
Modulation frequency	DC- 3 MHz
Digital Modulation	
Extinction ratio @ 3 MHz	> 30 dB @ DC
Rise/fall time	< 200 ns
RF ON/OFF ratio	70 dB
Input signal	0 - 5 V
Impedance	1 kΩ
Analog modulation	
Voltage range	0 - 5 V
RF ON/OFF ratio	60 dB
Absolute maximum ratings	-0.5 V – +5.5 V
Impedance	1 kΩ

C-FLEX

Beam delivery and emission control options


C-FLEX laser combiners feature a highly configurable beam delivery.

- Free beam or fiber coupled
- Single or dual aperture
- Optional electromechanical shutter
- Photonic crystal fiber available for high power broadband coupling
- Contact us for customized configurations



Optomechanical shutter

	Bistable	Unistable
Maximum frequency (Hz)	15	50
Thermal load (W)	n/a	2
Rise / Fall time (ms)	< 0.5	
Input signal port	SMB	
Input signal	0 - 5 V, 1 kΩ	

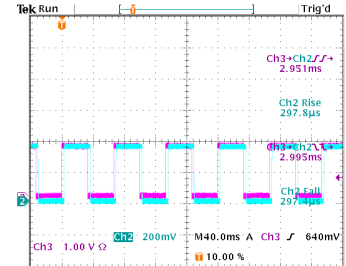

Dual aperture beam delivery

The C-FLEX laser combiner can be configured for one of two output ports. The power distribution between the two ports can be split on power or wavelength.

Fiber coupling options

A wide range of fiber coupled options are available for the C-FLEX laser combiner. Fiber coupled connectors are FC/APC as standard, with FCP8 or collimated output upon request. Broadband high-power fiber coupled solutions are available to cover the wavelength range 400-1100 nm.





Laser line power monitoring

Additional laser power monitors are available for each laser line, allowing for power monitoring of each integrated laser providing a 0-5 V output signal and additional LED indicators.


Thermal Management

Heatsink Specifications

C-FLEX Model	C4	C6
Heat sink article number	13471	13533
Heat sink dimensions (mm)	326 x 225 x 54	326 x 359 x 54

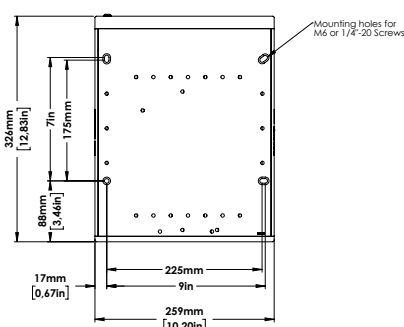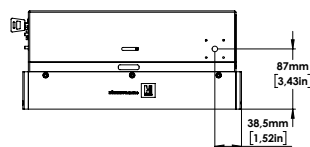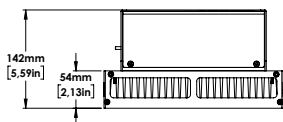

C-FLEX C4 Heatsink

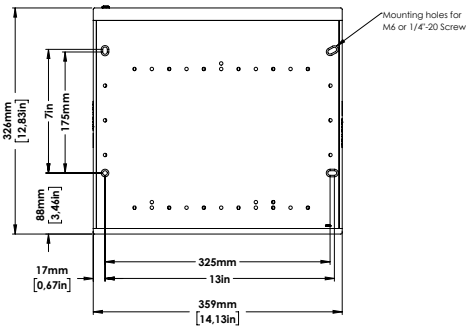



C-FLEX C6 Heatsink




C-FLEX

Mechanical Specifications

C-FLEX Model	C4	C6
Laser combiner (mm)	300 x 210 x 88	300 x 310 x 88
Weight, combiner without lasers or heatsink	< 3 kg	< 5 kg

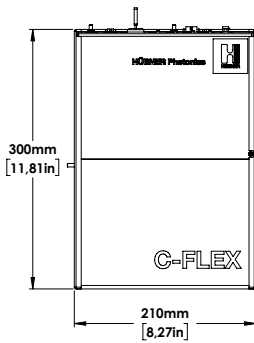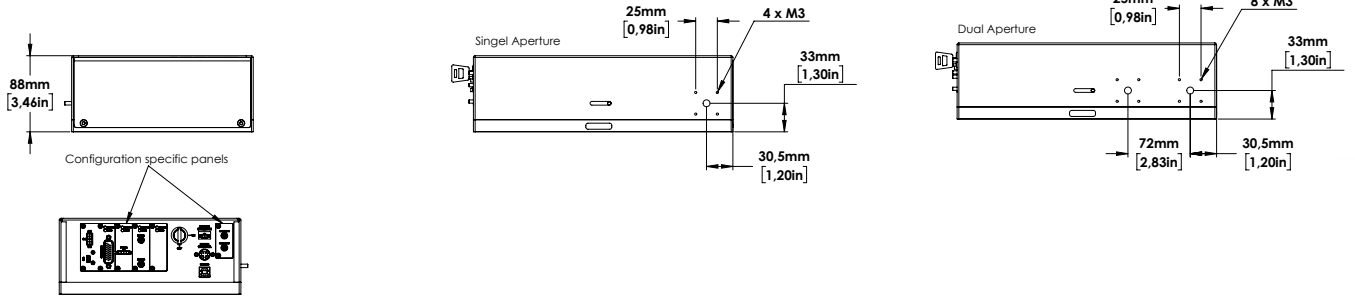

C-FLEX C4

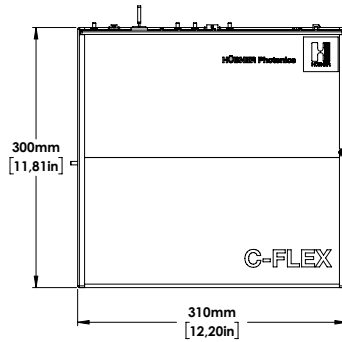

C-FLEX C6



Compatible Laser Products

Cobolt 04-01 Series

Powerful, single frequency, CW diode pumped lasers:

457 nm – 1064 nm up to 400 mW

<https://hubner-photonics.com/products/lasers/single-frequency-lasers/04-01-series/>



Cobolt 06-01 Series

Plug & play modulatable lasers:

375 nm – 1064 nm up to 400 mW

<https://hubner-photonics.com/products/lasers/diode-lasers/06-01-series/>




Cobolt 08-01 Series

Compact narrow linewidth lasers:

405 nm – 1064 nm up to 400 mW

<https://hubner-photonics.com/products/lasers/narrow-linewidth-lasers/08-01-series/>



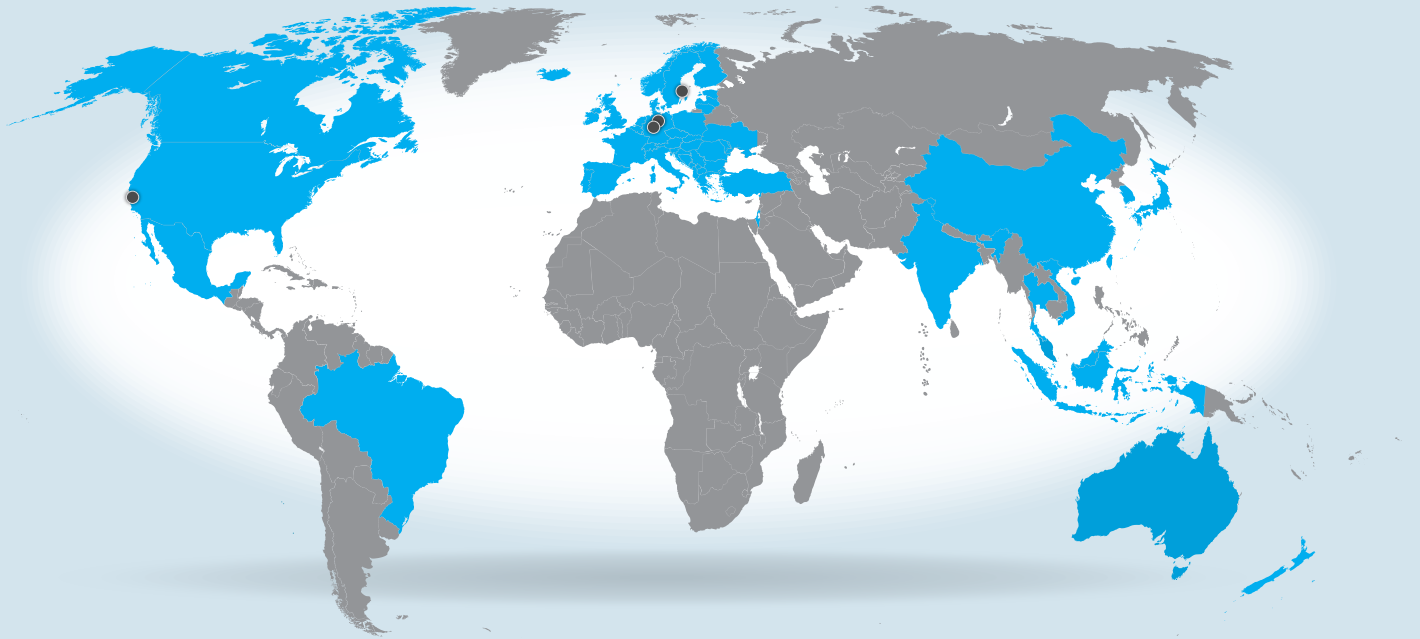

Our Locations

Cobolt AB, a part of HÜBNER Photonics
(Sales in Norway, Sweden, Finland and Denmark)
Solna, Sweden
Phone: +46 8 545 912 30
Fax: +46 8 545 912 31
E-mail: info.se@hubner-photonics.com

HÜBNER Photonics GmbH
(Sales in Germany, Switzerland and Austria)
Kassel, Germany
Phone: +49 561 994 060 – 0
Fax: +49 561 994 060 – 13
E-mail: info.de@hubner-photonics.com

HUBNER Photonics Inc.
(Sales in USA, Canada and Mexico)
San Jose, California, USA
Phone: +1 (408) 708 4351
Fax: +1 (408) 490 2774
E-mail: info.usa@hubner-photonics.com

VALO Innovations, a part of HÜBNER Photonics
(VALO Sales and Service)
Hannover, Germany
Phone: +49 511 260 390 70
E-mail: info.valo@hubner-photonics.com

HA Photonics Pty Ltd
(Sales in UK & Ireland - goods shipped from Europe)
United Kingdom
Phone: +44 735 944 0871
E-mail: info.uk@hubner-photonics.com

In need of technical support/service?
Send us information about your issue:
hubner-photonics.com/service-support

HÜBNER Photonics

